


2.450 kg



2.550 mm



26 HP

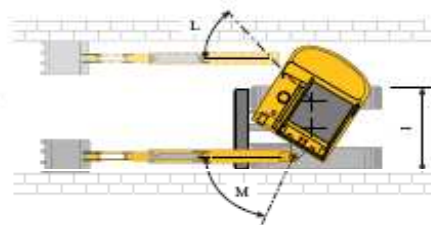

Technická data

Váha s rámem	2.450 kg
Váha s kabinou	2.520 kg
Trhací síla lopaty	2.000 kg
Stoupavost	38° -80%
Tlak na půdu	0,27 kg/cm ²
Pojzdová rychlost	2,5 - 4,5 km/h
Rychlost otáčení	10 ot./min.
Motor Kubota	1.300 ccm
Výkon	25,4 kW/2500 ot./min.
Pásky	kov / guma
Obsah nádrží	olej 43 lt./nafta 36,5 lt.

A	2.550 (2.700)	G	1.220
B	4.360	H	1.750
C	3.000	I	1.470
D	4.529	L	55°
E	1.830	M	80°
F	1.460	N	2.345

Axiální čerpadlo	28-28-22,5 lt./min.
Tlak	220 bar
Chlazení	tepelný výměník

Standardní výbava

Minibagr 224s s ochranným rámem - s kabinou
kit na kladivo
lopata 450 mm