


5.250 kg



3.690 mm



50 HP

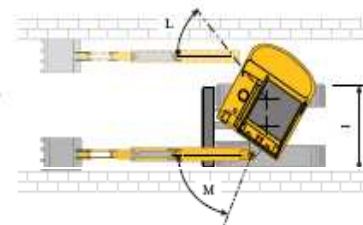

Technická data

Váha s rámem	5.100 kg
Váha s kabinou	5.250 kg
Trhací síla lopaty	3.500 kg
Stoupavost	38° - 78%
Tlak na půdu	0,28 kg/cm ²
Pojzdová rychlost	2,8 - 5 km/h
Rychlost otáčení	10 ot./min.
Motor Kubota	2.000 ccm T
Výkon	41,8 kW/2400 ot./min.
Pásy	kov / guma
Obsah nádrží	olej 76 lt./nafta 70 lt.

A	3.690 (4.000)	G	1.365
B	5.800	H	2.310
C	4.030	I	1.850
D	6.240	L	55°
E	2.450	M	80°
F	1.600	N	2.505

Axiální čerpadlo	60-60-43 lt./min.
Tlak	250 bar
Zubové čerpadlo	11,5 lt. / min.
Chlazení	tepelný výměník

Standardní výbava

Minibagr 254st s kabinou
kit na kladivo
lopata 600 mm